



Fig. No. 1

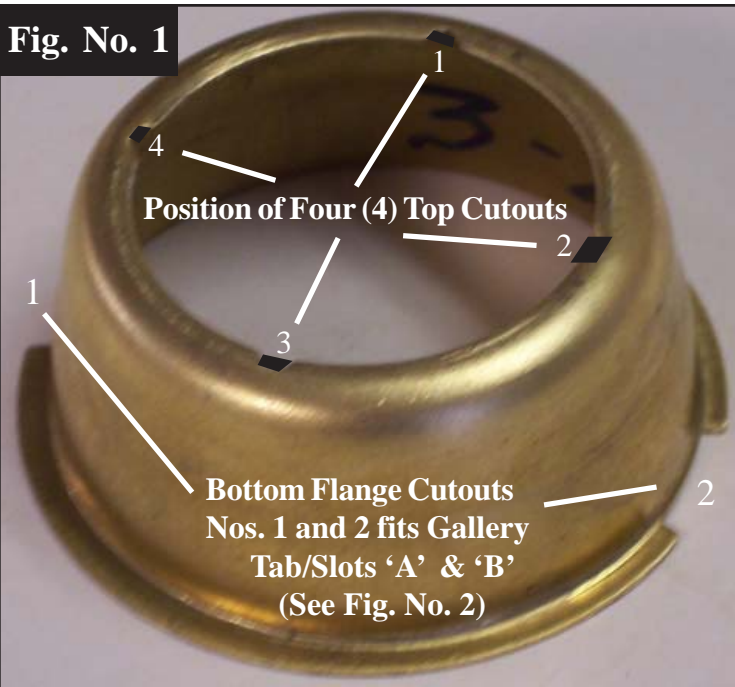


N146A Kone Kap Mantle Adaptor (Enlarged View)

Fig. No. 2

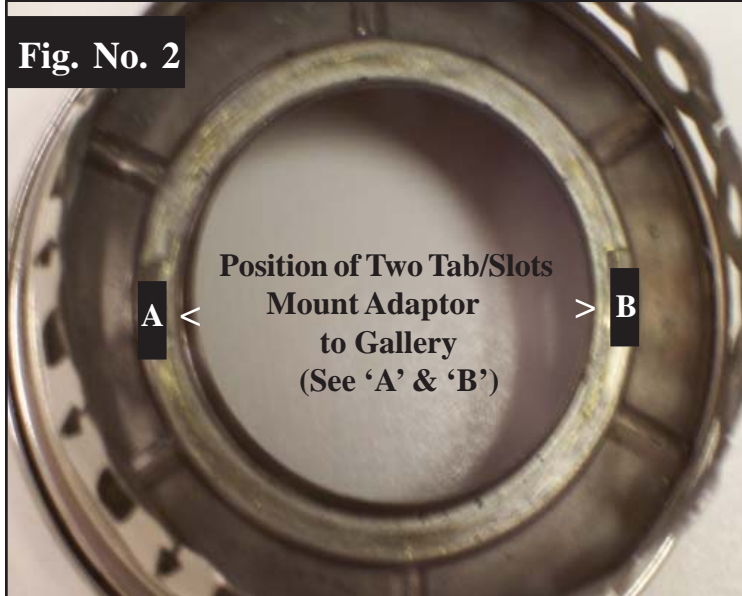

Model No. 11 Gallery (Top View)

Fig. No.3

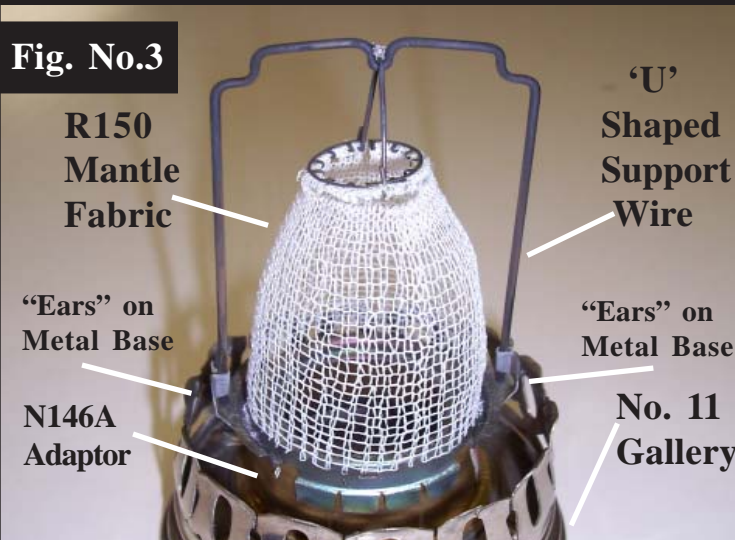

Model No. 11 Gallery with Adaptor Installed

Aladdin N146A Kone Kap Mantle Adaptor Installation Instructions

The N146A Aladdin Kone Kap Mantle Adaptor is designed to work with Models 3 thru 11 Aladdin Kerosene Mantle Lamps by allowing an Aladdin R150 Lox-On Mantle to be fitted onto earlier models that formerly used a N146 Kone Kap Mantle.

Fig. #1: Shows position of cut out notches for both the top and bottom of the N146A Kone Kap Mantle Adaptor.

The first step in mounting the adaptor to your lamp is to remove the gallery assembly (including mantle and chimney) from your lamp. Then remove the chimney and old mantle base, if any, from the gallery. Then you are ready to install the new adaptor.

Fig. #2: Shows position of tab/slots (A and B) on the gallery under which the cutouts on the bottom of the Kone Kap Adaptor are fitted. **First**, position the bottom cutouts of the adaptor directly onto the tab/slots. **Second**, turn the adaptor to the right until the slots are completely filled with the flange.

IMPORTANT: *Make sure flange completely fills slots to prevent any air leaks, which will upset air flow to mantle thereby producing a poor flame.*

Thirdly, after you have installed the adaptor, it needs to be centered on your gallery. With light finger pressure, move the adaptor back and forth until you feel that it is centered on the top of the gallery. Now you are ready to install the Lox-On mantle.

INSTALL R150 Lox-On[®] MANTLE AS FOLLOWS:
Caution: *Don't Touch Mantle Fabric To Prevent Damage.*

The top four (4) cutouts on the Adaptor are used to mount an Aladdin R150 Lox-On mantle to it. **First** hold the metal mantle base only by the "ears" that hold the support wire. **Second** simply line up the four tabs on the under side of the Lox-On mantle base with the top adaptor cutouts and, **Thirdly** gently depress the four (4) under mantle base tabs into the four cutouts and then **Fourthly** turn to the right 1/8 turn to lock onto adaptor. Again, exercise caution not to touch mantle fabric, as damage will result.

Finally, burn off mantle, as usual, re-install chimney to gallery and your Aladdin lamp is now ready to be lighted.

ALADDIN MANTLE LAMP COMPANY

681 International Blvd., Clarksville, TN 37040 USA

Tel: 931-647-4949 FAX: 931-647-4517

www.aladdinlamps.com EMAIL: sales@aladdinlamps.com

Lighting the World, Since 1908